

# REGIONAL CLIMATE VULNERABILITY ASSESSMENT

*Part 1: Localized Flood Risk*




**METROPOLITAN**  
C O U N C I L

# The Council’s mission is to foster efficient and economic growth for a prosperous metropolitan region

---

## Metropolitan Council Members

Alene Tchourumoff	Chair	Edward Reynoso	District 9
Katie Rodriguez	District 1	Marie McCarthy	District 10
Lona Schreiber	District 2	Sandy Rummel	District 11
Jennifer Munt	District 3	Harry Melander	District 12
Deb Barber	District 4	Richard Kramer	District 13
Steve Elkins	District 5	Jon Commers	District 14
Gail Dorfman	District 6	Steven T. Chávez	District 15
Gary L. Cunningham	District 7	Wendy Wulff	District 16
Cara Letofsky	District 8		

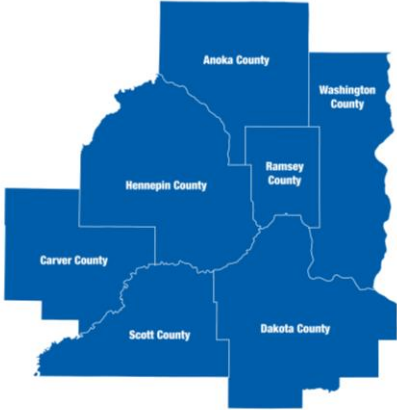

The Metropolitan Council is the regional planning organization for the seven-county Twin Cities area. The Council operates the regional bus and rail system, collects and treats wastewater, coordinates regional water resources, plans and helps fund regional parks, and administers federal funds that provide housing opportunities for low- and moderate-income individuals and families. The 17-member Council board is appointed by and serves at the pleasure of the governor.

On request, this publication will be made available in alternative formats to people with disabilities. Call Metropolitan Council information at 651-602-1140 or TTY 651-291-0904.

# CHAPTER 1: TRANSPORTATION & TRANSIT (DRAFT)

The metro area transportation and transit network consists of interrelated systems including surface roads and rails, transit services with over two hundred bus and train/LRT routes and related infrastructure, ten airports, and region-wide dedicated bicycle routes. The network serves over 3 million regional residents and is an interstate shipping and transportation hub. Administrative authority includes multiple federal and state level agencies, seven counties, over 200 local government units, and the Metropolitan Council, including Metro Transit.

To best understand the methods employed in creating the localized flooding data layer, please refer to the document entitled **Localized Flood Risk – Introduction**. For the transportation and transit analysis, sensitivity throughout the network was assessed, at the simplest level, in terms of the number of people affected by any potential disruption. Specific attributes were identified for many transportation and transit components that provided either a direct or proxy measure of affected users. For some components, the Flood Impact Zone itself provides the measure of vulnerability either because of very low impact threshold (rails, runways) or lack of other distinguishing attributes (bike routes).

Table 1. Sensitivity & Exposure by Transportation & Transit Asset

Transportation-Transit Asset	Low	Medium	High
<b>Bus Routes by Type</b>	<i>Express</i>	<i>Local</i>	<i>Hi Frequency</i>
<b>Bus Routes by Number Affected</b>	<i>1 route</i>	<i>2-3 routes</i>	<i>≥ 4 routes</i>
<b>Bus &amp; Transit Stops*, by Routes Served</b>	<i>1 route</i>	<i>2-3 routes</i>	<i>≥ 4 routes</i>
<b>Roadways, by Functional Class</b>	<i>Local &amp; Connector</i>	<i>All other Arterials</i>	<i>Principal Arterials</i>
<b>Rail Lines, Airport Runways, Bicycle Network</b>	<i>- Sensitivity/Exposure defined by Flood Impact Zone only. Primary, and in some cases Shallow/Primary, represent the highest vulnerability.</i>		

\*Transit stops include Rail Stations, bus stops within 1/8 mi. of rail stations, park and ride facilities, and Transit Center facilities.

Each asset’s sensitivity/exposure was compared against the Flood Impact Zone to create a composite ranking of vulnerability using the Vulnerability Matrix shown in Table 2. This matrix combines the level of sensitivity/exposure from Table 1 with the Flood Hazard to determine an overall vulnerability for a specific asset at a given location.

Table 2. Vulnerability Matrix for Transportation & Transit Assets\*

Flood Hazard		Vulnerability		
		Low*	Medium*	High*
<b>Flood Impact Zone</b>	Shallow	<i>Very Low</i>	<i>Low</i>	<i>Medium</i>
	Primary	<i>Medium</i>	<i>High</i>	<i>Very High</i>
	Secondary	<i>Low</i>	<i>Medium</i>	<i>High</i>
	Tertiary	<i>Very Low</i>	<i>Low</i>	<i>Medium</i>

\*This extra step is performed for Bus Routes, Transit Stops, and Roadways. The Low, Medium, or High from Table 1 is inputted into this matrix to determine vulnerability when intersected with the Flood Hazards.


## Overview of Regional System Assessment

Riverine flooding areas are generally known and regulated by relevant stakeholders, be it local floodplain managers or state agency staff. It is advisable that riverine flooding be considered with the latest modelling data and Atlas 14 precipitation estimates to ensure that all floodplain mapping is up to date and as accurate as possible.

**Figure 1. Comparison of Localized Flooding and FEMA Floodplains**

Localized flooding helps expand understanding of flooding dangers, which have traditionally relied upon rigorously studied and closely managed 100- and 500-year floodplains. Much of the built environment, including roads and rails, has intentionally been located outside the floodplain, or has been built to withstand flooding, whether as a matter of best practice or regulation.

When examining potential impact of flooding events on infrastructure, the floodplain should be considered alongside localized hazards for consideration of built assets, existing emergency management, and for potential compounding of hazards where both types of flood could occur.

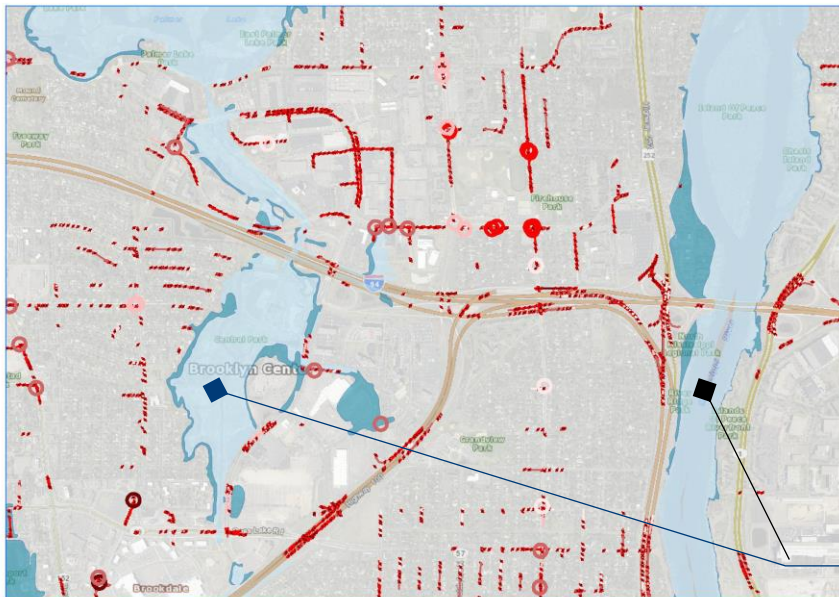

**FEMA Floodplain**

- 100 year
- 500 year

**Transit - Transportation Systems**

**Storm Flood Hazard**

- Very High
- High
- Medium
- Low
- Very Low

**Little overlap of transportation flood hazard with riverine floodplains**

Figure 1 shows that transportation and transit assets are generally designed with riverine flooding in mind and located outside of the regulatory floodplain. Therefore, The Transportation and Transit chapter of the CVA does not include analysis of riverine flooding.

The localized flooding data layer does not replace the FEMA flood information. It provides a more localized screening of areas that could be prone to flooding that can occur outside the influence of streams and rivers. In recent years, cities have seen much more urban or localized flooding from short, intense rain events. While communities plan for such occurrences, in some instances stormwater infrastructure can become overwhelmed or blocked. The localized flooding data shows potential flood risks in the transportation and transit network in the event of stormwater infrastructure failure.



To understand the potential localized flood impacts to the transportation and transit systems, the Council has produced an overview of systemwide exposure to localized flooding hazards.

Table 3 provides a systemwide overview of potential localized flooding impacts to transportation and transit assets. Due to the extensive nature of the transportation and transit network, these system assets are subject to some potential localized flooding impacts. The percentage of total assets within a Flood Impact Zone is relatively low, with 82.6% of all assets outside areas of potential risk. For assets located within hazard areas, more than one-third of all assets fall within the Primary flood hazard, with nearly half of all transit stops and nearly half of all LRT/commuter miles within a Primary flood hazard area.

**Table 3. Transportation & Transit Potential Localized Flood Vulnerability by Flood Impact Zone**

Asset	Total	Total Assets in FIZ*	Flood Impact Zone % for Assets in a FIZ				
			Primary	Secondary	Tertiary	FIZ Average Max. Depth**	Shallow
Bus Routes	5,976 mi.	17.4%	36.3%	27.3%	25.3%	4.76ft	11.1%
LRT/Commuter Lines	111 mi.	9.6%	47.5%	25.2%	18.4%	3.75ft	8.9%
All Transit Stops	19,422 stops	12.8%	46.6%	12.4%	12.9%	3.39ft	28.1%
All Roadways	44,266 mi.	12.8%	38.1%	25.2%	24.2%	3.87ft	12.5%
Regional Highways	24,584 mi.	16.2%	34.9%	26.4%	27.1%	4.28ft	11.6%
Bicycle Routes	6,773 mi.	15.5%	34.2%	26.6%	27.5%	4.02ft	11.6%

*\*Refer to Total Asset in FIZ column to determine total exposure to potential localized flooding for each asset. More than 80% of all Council assets are outside of a FIZ.*

*\*\*FIZ Average Maximum Depth refers to Primary, Secondary, and Tertiary FIZ. It does not include Shallow.*

Table 3 also shows the average maximum depth for vulnerable areas for each asset. In other words, where an asset intersects a Flood Impact Zone, we can have an average depth of flood potential for that asset where it intersects a FIZ. The risk for each asset depends on the importance assigned to different flood hazard depths. For instance, for LRT and Commuter rail lines, both Shallow and Primary flood levels represent a higher vulnerability, given the fact that even a little bit of standing water over the rail can affect this form of transit. For bus routes, the Shallow FIZ is of a much lower concern because buses can traverse Shallow areas of localized flooding without safety or operational issues.

It is important to note that Table 3 shows systemwide percentages and averages. Asset-based and site-specific analysis (assessment of a certain bus route, for example) should be conducted to clearly identify and prioritize areas of vulnerability and subsequent site-specific strategies to increase resilience of Metropolitan Council systems.

The sections that follow will describe the vulnerability of each component of the regional transportation and transit network, including the methodology for assessing vulnerability by asset, analysis, considerations for planning and response, and strategies for addressing the system vulnerabilities.

## Regional Highway Network

### Rationale

The highway network constitutes the primary conduit for all vehicular traffic throughout the region. While local streets account for the majority of overall road mileage, arterial routes (highways and related connecting and high-traffic roads) represent concentrations of traffic including personal, commercial, industrial, and transit uses. In many cases, these routes are more susceptible to traffic congestion or have restricted on/off access, further affecting sensitivity and exposure to flood events.

Functional Class was used to define sensitivity and exposure of the highway network. Functional Class is an attribute of all road features that serves to define the role of each roadway within a network, designed to provide a measure of traffic capacity, usage, accessibility, and travel speeds. For example, interstate highways carry the most traffic and the most people, and thus rank highest in exposure and sensitivity to a potential localized flood event (see Table 1).

### GIS Methodology

The Metropolitan Council's arterial roadways were compared with potential localized flood locations using an intersect operation. The arterial road classification was inputted into Table 2 to determine the level of sensitivity and exposure (low, medium, or high). The road was then intersected with the Flood Impact Zone (FIZ) to determine overall vulnerability, from Very Low to Very High.


### Analysis

All arterial roadways in the regional network intersect multiple flood zones and are subject to at least some potential flood hazard. Table 4 lists provides the regional overview of roads in the network subject to greatest vulnerability, including Primary flood zones along all arterial roads and both Primary & Secondary flood zones along interstate highways. In Figure 2, localized flood vulnerability is concentrated in the urban center, which is a function of greater road density compared to exurban and rural areas.

Table 4. High & Very High Potential Flood Vulnerability Arterial Centerline Miles by County


ANOKA	102.01 miles
CARVER	19.14 miles
DAKOTA	137.47 miles
HENNEPIN	652.78 miles
RAMSEY	239.85 miles
SCOTT	19.24 miles
WASHINGTON	61.27 miles
<b>7-County Total</b>	<b>1231.76 miles</b>

Figure 2. Regional Highway Network - Potential Flood Vulnerability

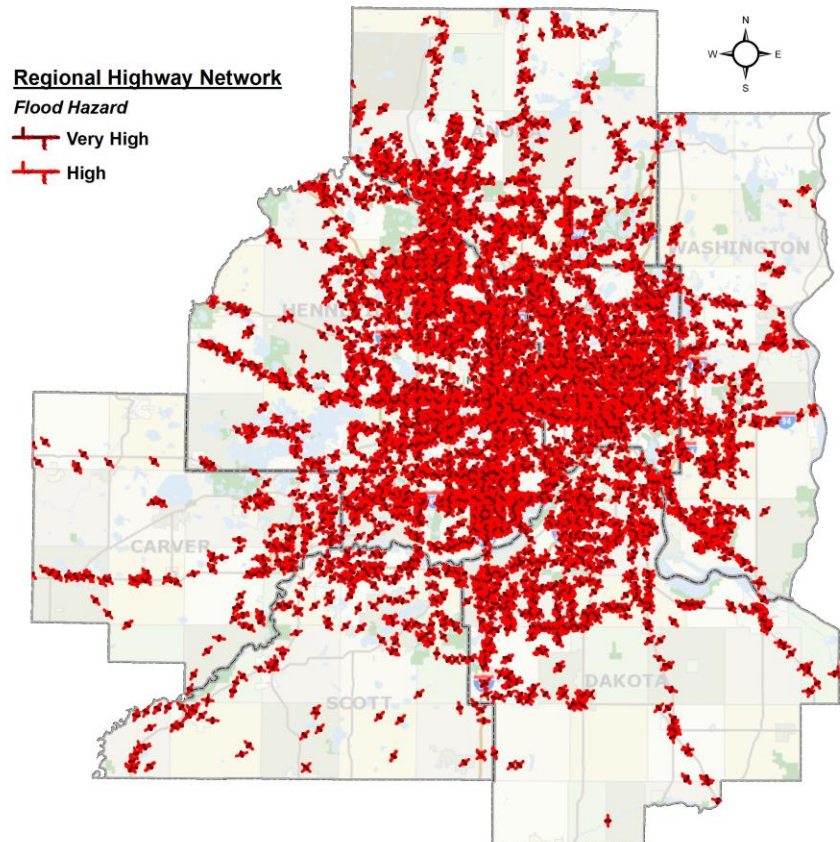

As a more localized example, Figure 3 shows the intersection of an interstate and major state highway subject to potential localized flooding. At this more site-specific level, potential obstructions become discernible. For example, on- and off-ramps are potentially impassable at two successive points, creating an increased possibility for stranding vehicles on the highway while reducing access for emergency services. Use of alternate routes via minor arterials and local roads may also be difficult or require very long detours, with limited passable crossings of either highway.

Figure 3. Potential Localized Flood Vulnerability at Major Regional Junction

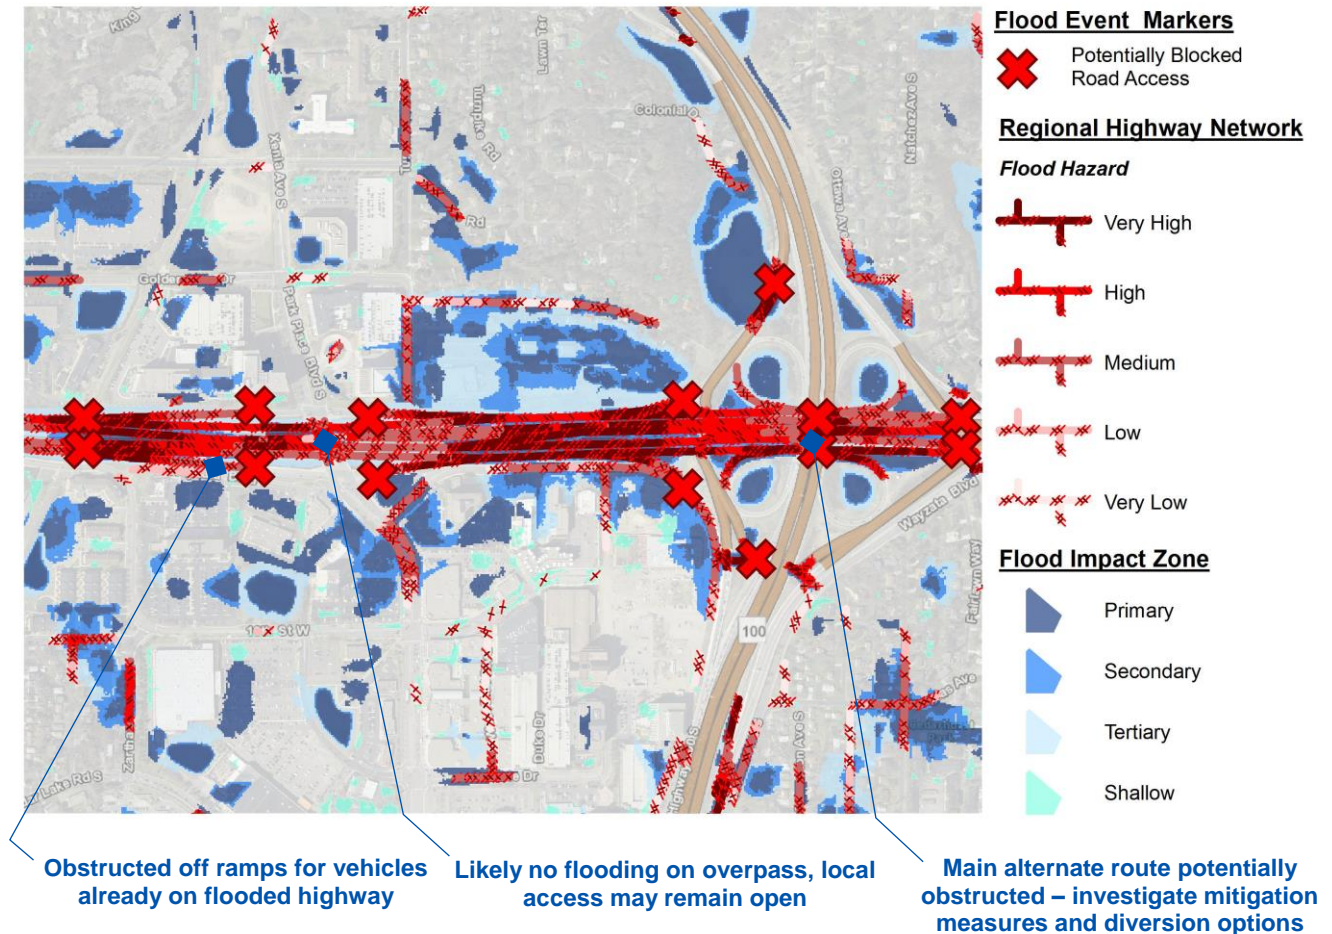

### Considerations

Management of the highway network has a wider range of authorities than other components of the regional transportation and transit systems. The Council and MnDOT share planning responsibility for the metropolitan highway system, while MnDOT carries out day-to-day operations and repair on the system. The metropolitan highway system also serves and connects to arterial routes that may be subject to one or more county and municipal jurisdictions, as well as the local street network. Meanwhile, Metro Transit and suburban transit providers operate vehicles and facilities across all parts of the network. Adaptive planning will often involve (or impact) multiple governmental units, as well as the wide array of transportation network stakeholders.

### Existing Strategies

MnDOT and partner road authorities are responsible for responding to localized flooding on the metro arterial network. Impassable roads are subject to road closures and rerouting for motorists. MnDOT and partner road authorities perform routine road maintenance to reduce the impacts of localized flooding on the metro arterial network.

## Potential Strategies

### *Metropolitan Council*

- Council to conduct arterial assessment of vulnerable areas through collaboration with relevant road authority and stakeholders
- Council to collaborate with relevant authorities and stakeholders to increase surface water infiltration, through green infrastructure practices where possible, in potential vulnerable areas
- Council to plan for re-routing and alternative routes with agency and community partners
- Council to facilitate creation of a regional notification of road re-routing, similar to the [Hennepin County Transportation Map](#)

### *Local Strategies*

- Local jurisdictions to institute volunteer adopt-a-drain programs for local roads, using vulnerable areas for prioritization
- Local Emergency Management to use prioritization of vulnerable areas to devise re-routing plans during extreme weather events



## Light Rail/Commuter Rail

### Rationale

The rail system is unique in its sensitivity to flooding, with a lower sensitivity and exposure threshold than other assets and generally high impact in terms of persons affected. Moreover, because it operates in a dedicated right-of-way with fixed points of access, rerouting or diverting vehicles is not an option, and a different set of mitigation and adaptive measures are required than might be applied for other modes of transit. Finally, the three lines have varying spatial, built, and use characteristics. As such, an individual analysis section is provided for each.

### Methodology


Potential flood exposure for the regional rail transit system is extensive. To consider the spectrum of impact in a potential event, train line infrastructure, nearby connecting road networks, and station level exposure were each evaluated. The localized flooding analysis encompasses the seven-county metro area, but excludes the terminus of the Northstar Line in Sherburne County. All measures and analysis below include only the Anoka and Hennepin County portions of the Northstar line.

Immediate exposure is represented by flood waters that could affect the operation of rail vehicles on the track. The transit routes layer was compared with localized flooding Flood Impact Zone locations using an intersect operation, providing segments of rail lines within potential flood areas (Figure 4). Because of the low water depth required for disruption (as little as 2" over the top of the rail), the Shallow category was grouped with the Primary Flood Impact Zone for the purposes of this analysis.

The road network serving regional rails provides the origin points for many rail trips, as well as access for relief buses or emergency service in the event of stranded trains and riders. The complete road network feature was clipped to a one-mile radius of rail lines and intersected with FIZ, identifying all access points subject to potential flood.

Riders connect to rail transit at stations, which are often reached via bus transfers and park & ride facilities. The Bus Transit section of this chapter considers vulnerability to transit stops throughout the system.

Figure 4. LRT and Commuter Rail - Potential Flood Vulnerability

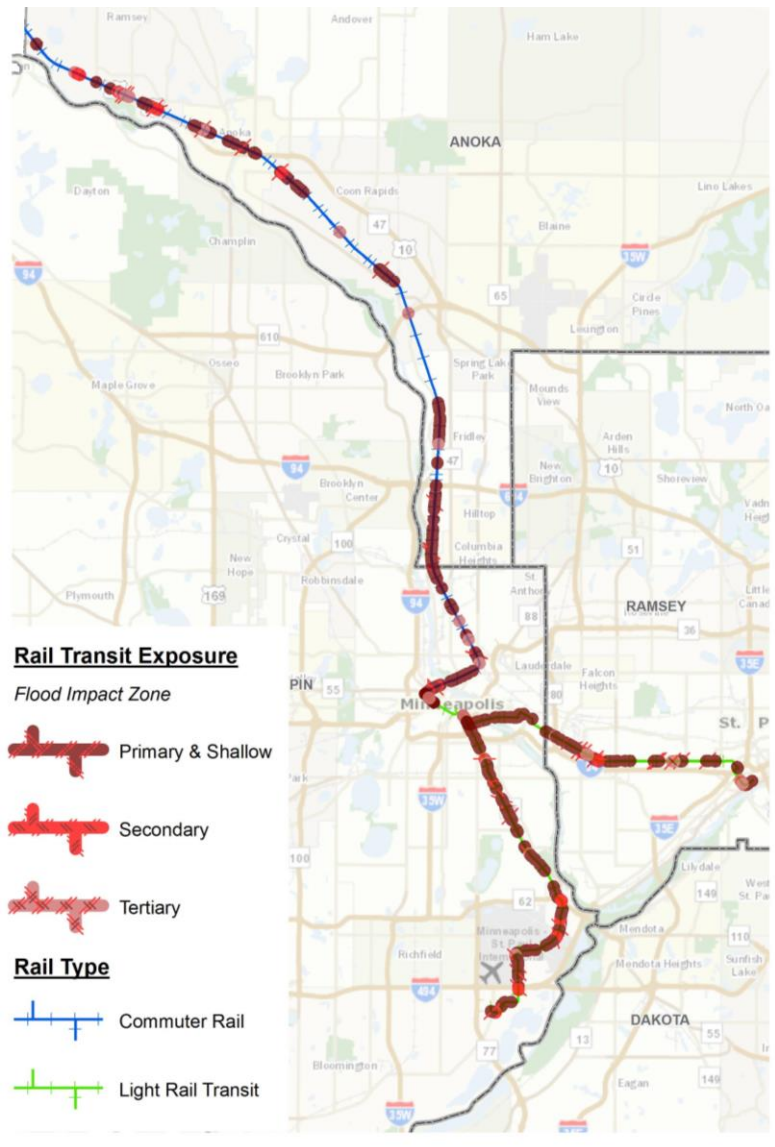

### Analysis: Metro Blue Line LRT

Metro Blue Line was the first operational LRT line in the system and currently provides well over 10 million annual trips. Features served include some of the region’s largest employment centers, the international airport, and major recreation, commercial, institutional, and medical destinations. Red Line BRT extends service to the south, and transfer connections are available along the line to 149 additional Metro Transit and partner routes.


The Blue Line is intersected at short, frequent intervals by Flood Impact Zones and is subject to marginally greater total exposure than either the Green Line or Northstar. While Flood Impact Zones account for only 15.5% of mileage on the line, the greatest length without potential flooding is still less than one mile. Moreover, over 80% of all exposure is in the Primary or Shallow zones, which are the first to fill and most likely to create flooding in a storm event, even the small events which tend to occur more frequently.

**METRO BLUE LINE**

- 23.5** miles of track
- 10.2 million** trips in 2016
- 19** stations, 5 shared with Green Line
- 150** connecting transit routes
- 3.67** miles of line potentially subject to localized flooding
- 80.6%** of potential flood zones are highest category of hazard

Blue Line LRT stations are typically, though not always, elevated 18-24” above grade, providing some degree of protection from flooding and reducing direct exposure to only a few stations on the line. Bus stops and park-and-ride lots providing transfer service to and from stations are, however, more broadly exposed, creating a second tier of potential disruption. Bus and transit stops are addressed in greater detail under the Bus Transit section of this analysis.

Figure 5. Metro Blue Line - Potential Localized Flood Vulnerability

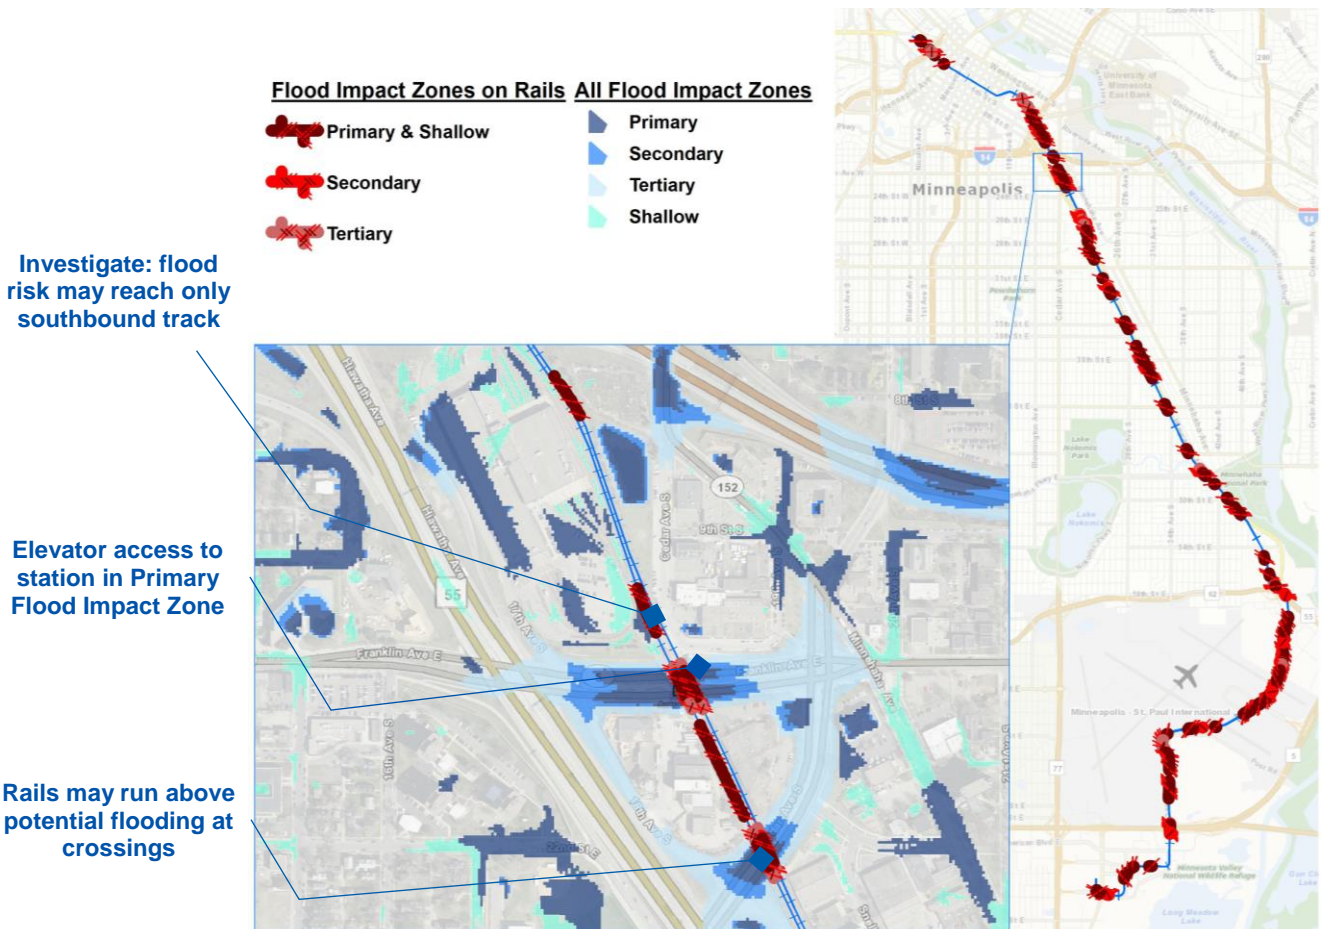



## Analysis: Metro Green Line LRT

The Metro Green Line was the second LRT line in the system and currently delivers more than 12 million annual trips. The line serves 18 stations connecting the Minneapolis and St. Paul downtowns, with the five westernmost stations shared by Metro Blue Line. Features of interest include the University of Minnesota and the home facilities for every major Minnesota professional sports franchise. BRT service on the A Line connects at the line's midpoint, and transfer access is available to 167 additional transit routes.


The Green Line, like the Blue Line, has many intersections with Flood Impact Zones. Potential flood severity, however, may be lower along the Green Line, with only 54.5% of exposure falling in to the Primary or Shallow zones. The Green Line also exhibits several extents free of any flood exposure. Stations are generally elevated and have similar considerations to those of the Blue Line.

**METRO GREEN LINE**

- 18.01** miles of track
- 12.7 million** trips in 2016
- 18** stations, 5 shared with the Blue Line
- 168** connecting transit routes
- 3.52** miles of line potentially subject to localized flooding
- 54.5%** of potential flood zones are highest category of hazard

A caveat applies to the Green Line analysis east of the shared stations in Minneapolis. The elevation data used to create the localized flood data was captured in 2011, prior to the excavation and building of the line, including stations and much of the University Avenue corridor alignment. As such, this

Figure 6. Metro Green Line - Potential Localized Flood Vulnerability

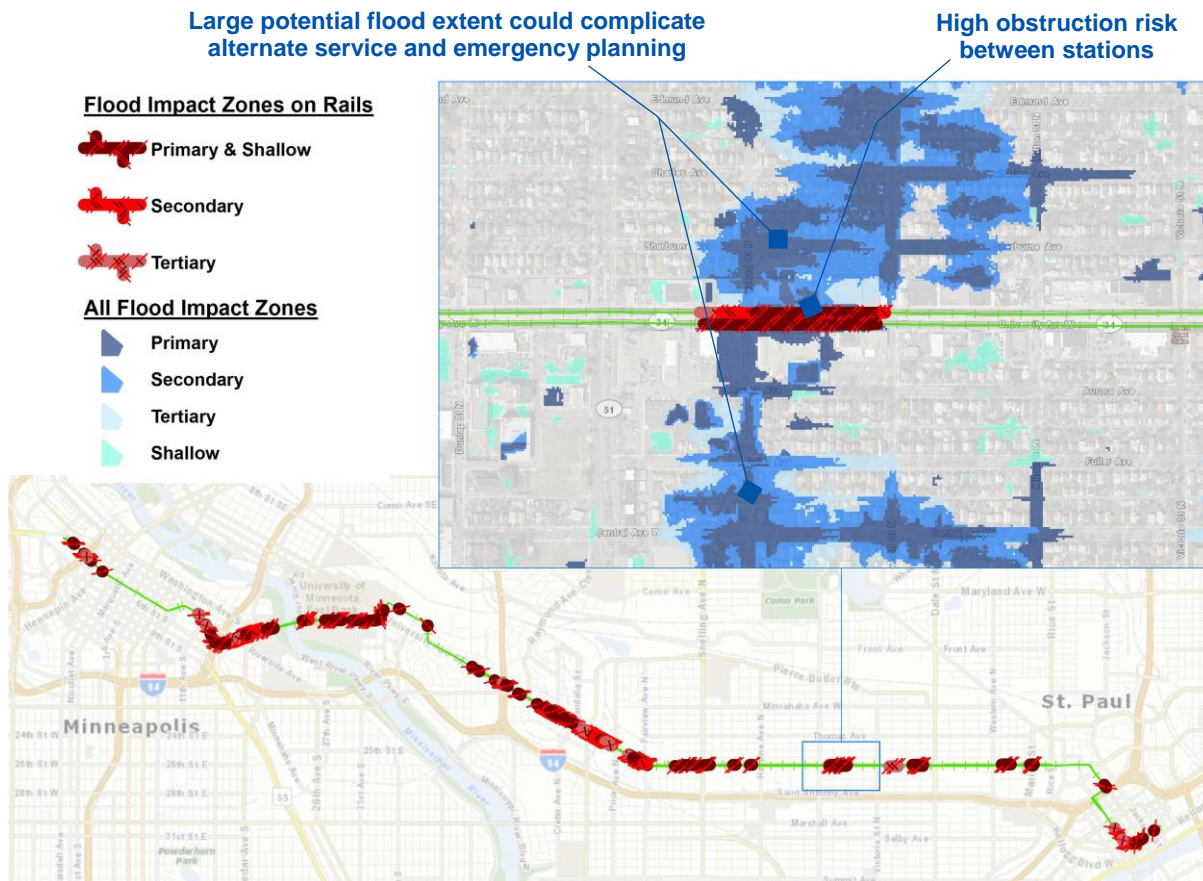

analysis should only be considered as preliminary guidance, subject to further ground-truthing and evaluation depending on the final build characteristics at any given location along the line.



## Analysis: Northstar Commuter Rail


The Northstar Line serves long distance commuters between the north metro area and downtown Minneapolis. Since commencing operations in 2010, annual trips have fluctuated but have always exceeded 700,000. Northstar riders can transfer to any of 69 additional transit routes near the line terminus in Minneapolis.

Within Anoka & Hennepin Counties, Northstar intersects 3.5 total miles of Flood Impact Zones, only 5% of total track length and a much lower proportion than either LRT line. Several extents of the Northstar line are free of any flood exposure. This is likely due in part to the elevated protection afforded by operating on a raised rail bed. Stations are again generally elevated to accommodate the larger rail vehicles, but otherwise have similar considerations to those of the LRT stations.

**NORTHSTAR LINE**

- 69.81** miles of track in metro
- 711,000** trips in 2016
- 7** current stations
- 69** connecting transit routes
- 3.5** miles of line potentially subject to localized flooding
- 73.2%** of potential flood zones are highest category of hazard

Figure 7. Northstar Commuter Line - Potential Localized Flood Vulnerability

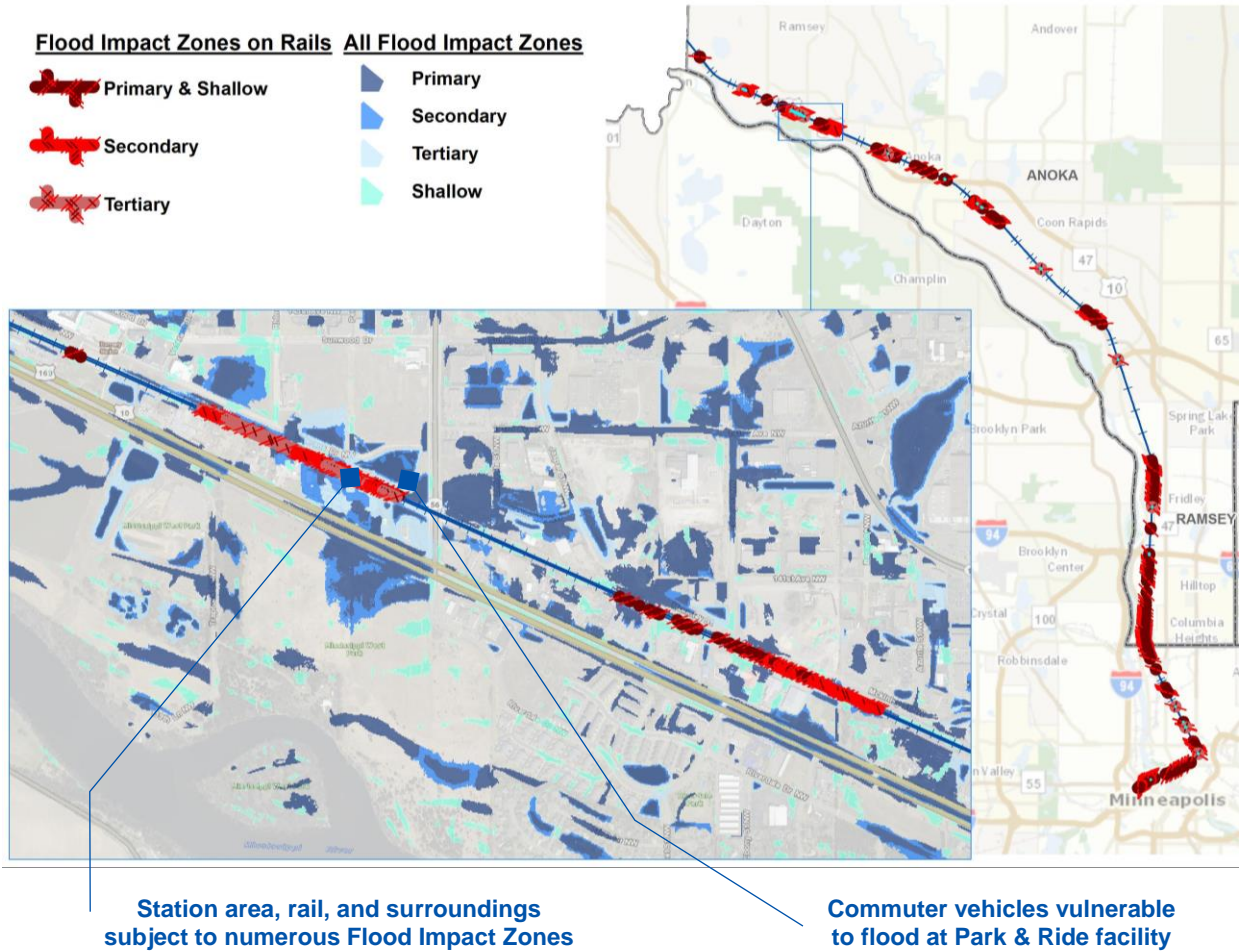

## Considerations

The Northstar commuter line operates on freight rails, with larger, heavier rolling stock and different motive power (diesel) than the two LRT lines (electric). However, the braking or traction control systems for each are comparable and subject to the same limitations in flood conditions. Safety protocols on the Northstar Line are dictated by BNSF procedure, including inspections on the line and speed reductions in the event of flooding. Similar procedures are in place for Metro Transit LRT operators.

Rail operations hardware, such as signal and crossing control houses, were not assessed for localized flooding vulnerability. These components are typically sealed metal structures with electronic equipment responsible for controlling crossing gates, lights, and other functions supporting public and operational safety. Technical information regarding sensitivity to water infiltration was not available on these structures at the time of analysis.

The nature of the rail system means that in the event of a flood, a train unable to proceed at any single point may create an impassable obstruction, causing an entire line to be out of service. With average weekday trips in the neighborhood of 200,000, alternate bus or shuttle relief service may be insufficient. To a greater degree than other assets, adaptive planning may need to focus more on proactive solutions that can either prevent or quickly drain flood areas along the rail line, rather than more reactive measures.

## Existing Strategies

### *Northstar Commuter Rail*

The Northstar Line is a federally mandated and regulated railroad. The Federal Railroad Administration (FRA) published the Passenger Train Emergency Preparedness Rule in the Code of Federal Regulations (CFR) in 1998. The Rule is located in the Title 49, Department of Transportation, Part 239. CFR 49, Part 239 requires one full scale emergency response exercise every two calendar years.

The Northstar Line is operated by Metro Transit, with BNSF engineers. The Northstar Line is governed by a joint Northstar/BNSF Passenger Train Emergency Preparedness Plan which complies with federal requirements. Metro Transit has also adopted the Northstar Commuter Rail System Safety Program Plan (SSPP), with the express purpose of safety enhancement through coordination, satisfaction of federal and state requirements, and identification and elimination of identified hazards through an established framework.

### *Light Rail Transit*

The Light Rail Transit System Safety Program Plan (SSPP), the Light Rail Operations Emergency Management Plan, and the Metro Transit Security and Emergency Preparedness Plan work in concert with one another to ensure internal and external coordination and preventative measures that embrace hazard mitigation in line with an all-hazards approach to emergency management within the federal National Incident Management System (NIMS). Metro Transit conducts emergency response exercises periodically with agency partners. The NIMS protocols are in place to ensure cross-agency management of emergency situations, be they related to inclement weather or a public safety issue.

LRT System Safety Plan requires one emergency response exercise every calendar year. Processes and decision-making emphasize coordination and integration of capabilities, hazard identification and mitigation, and restoration of service.

Metro Transit staff indicated that the Standard Operating Procedures for the LRT requires operators to reduce speed to 10 mph if as little as 2 inches of water covers the rail. If the diameter of flood area is over 2 feet, the LRT operator should not proceed without Rail Operations Manager approval. Any train

exposed to water deeper than 2” above the rail must be written up for a maintenance inspection. This practice ensures that areas prone to localized flooding are constantly analyzed for potential increase in vulnerability.

## Proposed Strategies

### *Metropolitan Council*

While Metro Transit and BNSF have robust protocols and procedures in place for hazard mitigation, it is advised that the localized flooding data be used to identify areas for a focused assessment of potential localized flooding hazards, coupled with use of the data as a front-end planning tool to assist in providing route redundancy in the event of operations disruption.

- Metro Transit/BNSF to perform site review and audit of all Shallow & Primary rail segments
- Metro Transit staff to document all flood areas that disrupt LRT operations and compare these to localized flooding data
- Metro Transit to enact protocols for relief transit vehicles in advance of forecasted severe storms
- Metro Transit to assess localized flooding impacts on rail operations hardware using technical structure specifications for water infiltration
- Metro Transit to work with local jurisdictions and stakeholders to enact stormwater best management practices and ongoing maintenance in jurisdiction’s right-of-way along LRT and Commuter transit corridors
- Metro Transit to prioritize vulnerable station areas to communicate localized flooding potential to riders in a variety of formats and languages



## Bus Transit

### Rationale

Although bus routes and stops are closely linked, exposure to flood hazards differs for bus routes (the linear street network along which the bus itself travels) versus bus stops (the points at which pedestrians embark or disembark). On routes, a bus is generally able to operate safely at a water depth of one foot, and is not likely to experience great difficulty until depths reach two feet or more. As such, unique among the transit assets, Shallow flood areas are omitted from consideration with Bus Routes. Conversely, according to the National Weather Service and NOAA, an adult can be knocked down and even swept away by flood depths as shallow as six inches. Since most transit stops do not provide physical protection from flooding, independent Shallow flood areas (up to 1 foot deep) remain a concern there.


Asset-specific sensitivity and exposure was quantified based on available data, as shown earlier in Table 1. The Route Type provides a measure of ridership, with High Frequency, Urban/Suburban, and Express representing high to low sensitivity and exposure for each route. Bus stops were assessed based on potential ridership impact, considering number and type of routes served by each stop.

### Methodology

The regional Bus Transit system is both extensive and complex, with over two hundred different bus routes serving nearly 20,000 stops along 6,000 road miles. Metro Transit administers the core system infrastructure and routes, and partners including SouthWest Transit and MVTa provide additional service on extended networks between the urban center and suburban commuting centers. Riders connect to the system at street corner bus stops and other transit hubs including park and ride lots, rail stations, and Transit Centers – multi-route sites offering amenities designed to enhance convenience and the transit experience.

Data on active bus routes from all providers (distinct from the three rail transit lines) was intersected with Flood Impact Zones to identify points of exposure and consolidate the line and flood attributes. Transit from all providers was assessed by merging individual layers for bus stops, park & ride stops, transit centers, and rail stations. The combined layer with all stop types was then intersected with FIZ, identifying which stops would be vulnerable and to what degree. Figure

Figure 8. Bus Routes and Stops - Potential Localized Flood Vulnerability

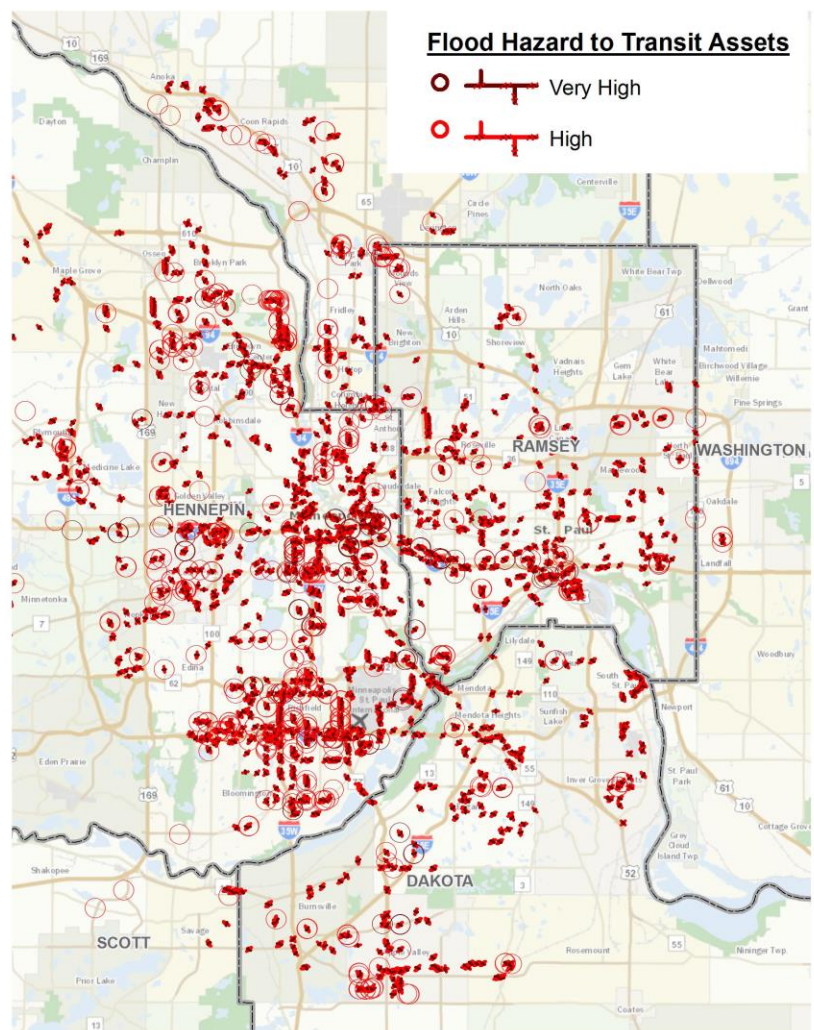




8 provides a regional overview of the greatest potential flood hazards to the bus transit system. A total of 529 bus stops (2.7% of all stops) fall into the highest hazard categories (High, Very High) along with numerous points along every route. The circles signify potentially impacted transit stops, while the segments depict potentially impacted routes.

The assessment of the bus routes consists of analysis of the routes themselves, not the start and terminus of the journey from a bus garage. Bus garage access and egress impacts to localized flooding will be assessed in a separate Council Facilities chapter.

### Analysis

All routes traverse some Flood Impact Zones, and all serve bus stops also at some level of flood hazard. On average, all bus routes traverse 26 potentially affected stops. Figure 8 exhibits concentrations of exposure in several areas, including major destinations Minneapolis & St. Paul downtowns and the MSP Airport & Mall of America vicinity. Figure 9 illustrates the specific routes serving the greatest number of vulnerable stops, peaking at 92 vulnerable stops on Routes 4 and 9.


**Figure 9. High Vulnerability Bus Routes by Number of Stops in Flood Impact Zones**

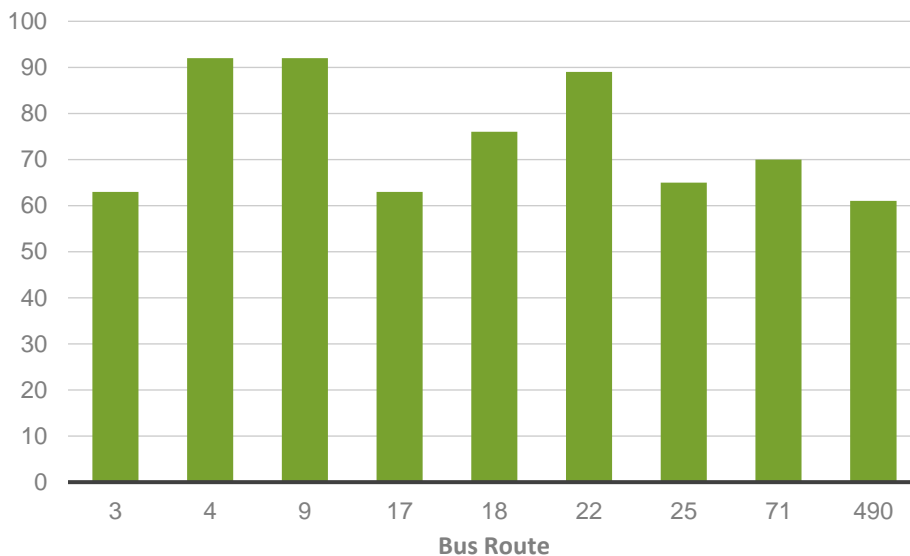

Route 4 is one of the longest in the system, traversing over 20 miles and four hundred stops in each direction. Figure 10 highlights an extended portion of the line, with hazards identified at each stop and along the on-street route. Flood Impact Zones typically encroach on the route for short extents but at frequent intervals, so that while some stops are not directly affected, the potential for service disruption and hazard to riders boarding or alighting remains present in every neighborhood served.

Figure 10 also provides a closer look at a low-lying location along Route 4 with a history of storm-related flooding. Six bus routes in total provide service to this area, with stops at every intersection along the major thoroughfares. The confluence of high ridership and a broad contiguous Flood Impact Zone creates a localized concentration of High to Very High asset vulnerability.

Figure 10. Portions of Bus Route 4 - Potential Localized Flood Vulnerability

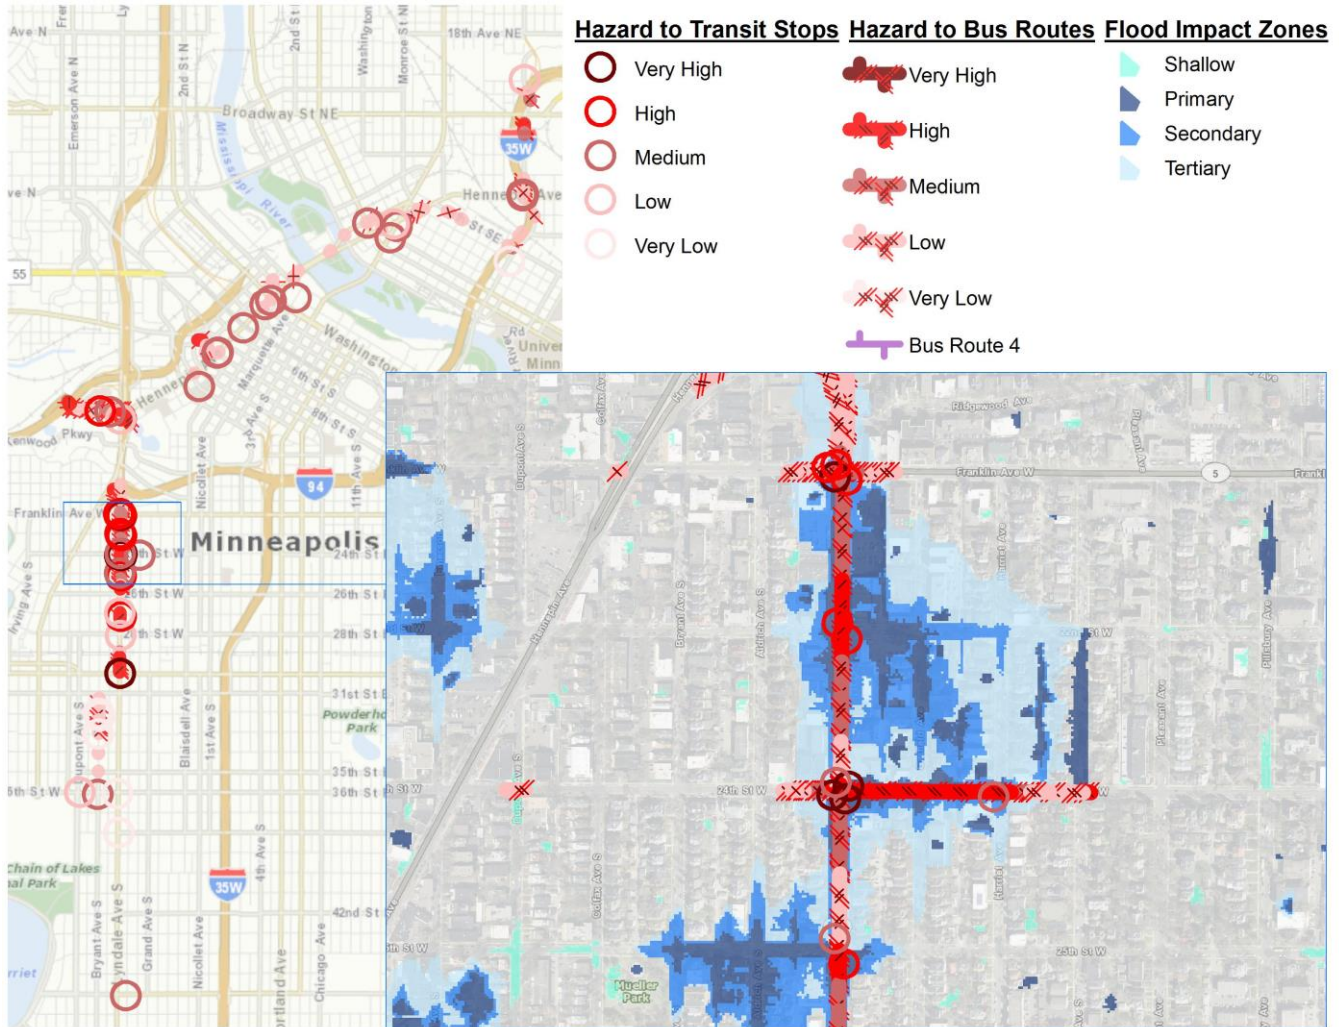

## Considerations

Buses are a resilient and adaptable resource relative to much of the other transit infrastructure. They can utilize the entire surface road network to reroute quickly in accordance with emergency plans. Buses can traverse deeper levels of flood water than most other vehicles on the road. In broad terms, buses are therefore subject to lower risk than bus stops, riders, trains, and other components of the transit system.

By comparison, Bus Stops represent a more vulnerable component of the system due to the required pedestrian accessibility. Alternative stops might be sited to higher elevations or other safe locations and employ rerouted buses, but implementing and communicating that strategy to vulnerable pedestrians during a flood event may be challenging.

## Existing Strategies

The Metropolitan Council employs an ‘all hazards’ approach to emergencies that affect Metro Transit operations. Metro Transit identifies potential hazards, and potential impacts to operations. Metro Transit also engages in scenario planning and emergency planning with partner agencies.

In Minnesota, public safety emergency responders are trained to follow the National Incident Management System (NIMS). NIMS employs the Incident Command System (ICS), which allows agencies to communicate and operate during an emergency through use of common terminology and cooperative operating procedures. The ICS applies from the time an emergency occurs until the requirement for management and operations no longer exists. The staff person in charge of ICS at Metro Transit is referred to as the Incident Commander and is required to have obtained a State Certification in Emergency Management.

Metro Transit's Bus Operations Emergency Plan embraces the National Incident Management System (NIMS). The existing Plan was developed in collaboration with partner public safety agencies within Metro Transit's operational jurisdiction. The Transit Control Center (TCC) unit manages the Standard Operating Procedures and the Continuity of Operations Plan (COOP), both of which are deployed in the event of operation disruption.

Following the 2007 I-35 bridge collapse, the Minnesota Legislature passed legislation and Governor Dayton issued Executive Order 10-06 to enhance State-level coordination of emergency preparedness, planning, response, recover, hazard mitigation, and continuity of operations and service continuation responsibilities. Metro Transit is assigned emergency responsibilities through these measures.

## **Proposed Strategies**

### *Metropolitan Council*

While Metro Transit has robust protocols and procedures in place for hazard mitigation, it is advised that the localized flooding data be used for a focused assessment of potential localized flooding hazards, coupled with use of the data as a proactive measure to assist in providing route redundancy in the event of operations disruption. The localized flooding data can also be utilized when planning new bus routes or changes to existing bus routes.

- Metro Transit to conduct a more detailed analysis and prioritization of all vulnerable routes and stops across the network
- Metro Transit to develop re-routing plans for potential vulnerable areas on a route-by-route basis
- Metro Transit to leverage local knowledge of experienced drivers for re-routing and temporary stop planning
- Metro Transit to work with relevant local stakeholders to institute volunteer adopt-a-drain programs for local bus stops, using vulnerable routes and bus stop areas for prioritization
- Metro Transit to prioritize vulnerable routes and bus stops to communicate localized flooding potential to riders in a variety of formats and languages

## Aviation

### Rationale

According to Federal Aviation Administration (FAA) guidelines, 1/8 inch of standing water is enough to present a hydroplaning hazard to aircraft attempting to land. As such, runway exposure and sensitivity is defined only by Flood Impact Zone, with no additional weighting metric.

Surface roads are the means of connecting to or from airport services and resources, including possible evacuation from a flood event, access to emergency service resources or shelter staged on site, and flow of relief supplies and equipment arriving from outside the immediate vicinity. Connectivity to the airport is important for its capacity in reducing the impacts from flood events.

### Methodology

Eleven facilities make up the regional aviation assets, detailed in Table 5. Minneapolis-St. Paul International (MSP) is the region's commercial airport, while St. Paul Downtown provides significant corporate and general aviation reliever airport services. Seven minor airports provide primarily general aviation services, while Flying Cloud, Anoka/Blaine, and South St. Paul provide additional corporate flying operations. The two seaplane bases are privately owned, but they are part of the aviation system.

Table 5. Metropolitan Airports

Airport Name	Classification	2016 Take-offs & Landings
Minneapolis - St. Paul International	Major	412,898*
St. Paul Downtown	Intermediate	54,548*
Airlake	Minor	38,618*
Anoka County/Blaine	Minor	80,845*
Crystal	Minor	36,967*
Flying Cloud	Minor	84,038*
Lake Elmo	Minor	27,275*
South St. Paul	Minor	51,000
Forest Lake	Special Purpose	8,030
Lino Lakes Seaplane Base	Special Purpose	4,108
Wipline Seaplane Base	Special Purpose	

\*Information provided by MAC staff on October 16, 2017.

The Metropolitan Airports Commission (MAC) is a public corporation that owns and operates MSP and 8 smaller reliever airports throughout the region. The Council works with MAC to ensure that planned airport improvements are consistent with regional plans.




For localized flooding analysis, airport runways were assessed using an intersect operation with Flood Impact Zones, defining the location and exposure for all runway surfaces subject to flooding. To assess connectivity with surrounding communities, all roads within one mile of each airport were intersected with potential flood areas.

### Analysis

Runways were found to be subject to minimal flood risk in total, with very little flood encroachment. For nine out of ten airports, roadway access was also found to be maintained with at least one route available reaching an arterial roadway without passing through a Flood Impact Zone. This limited risk is due to the extensive planning and engineering that goes into developing and operating the airports.

Figure 11. Surface Access to St. Paul Downtown Airport Under Potential Localized Flood Conditions is at High to Very High Vulnerability of Obstruction

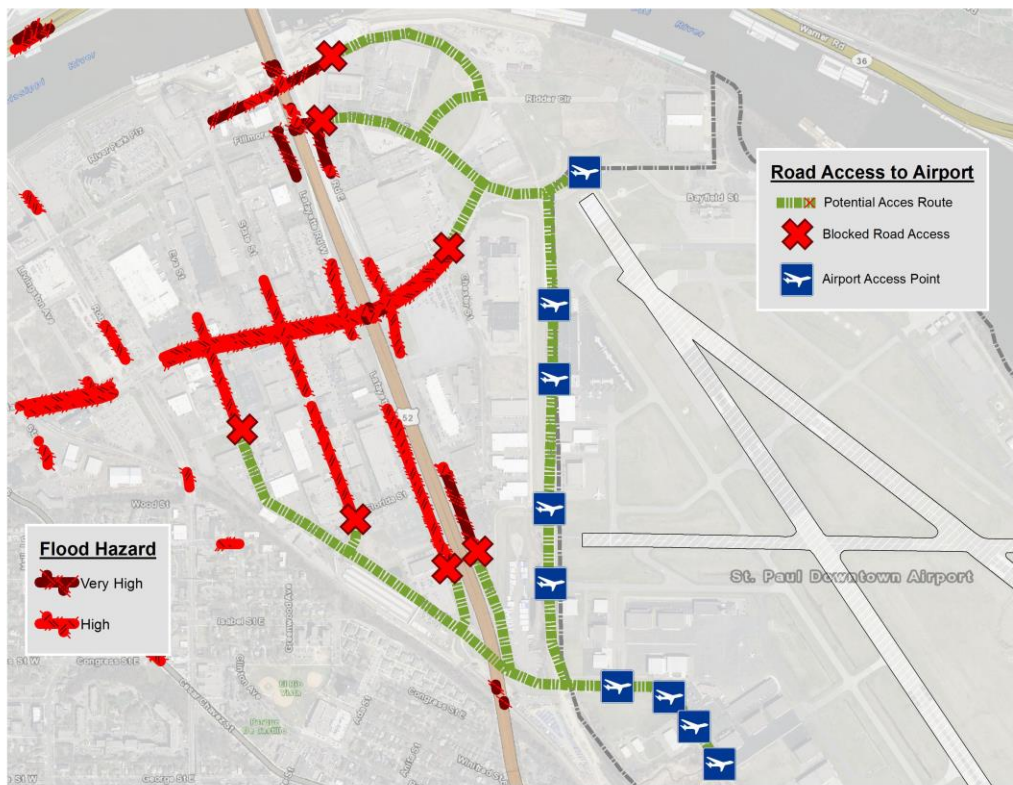

The St. Paul Downtown airport is located in a low-lying flood plain on the banks of the Mississippi River and therefore has a history of riverine flooding. In 2008, a flood wall was installed to protect against riverine flooding. Besides potential riverine flooding impacts, the localized flood analysis shows considerable exposure and sensitivity to localized flooding as well, with all connecting surface roadways at risk of obstruction by High or Very High vulnerability to flooding. In the most severe scenario (Figure 11), vulnerable areas potentially block access to all roads, arterial or local, within 4 blocks or less of all airport gates, completely isolating the airport from surface access to or from the surrounding community.

### Considerations

Aviation safety and facility resilience are, in general, recognized as important components of design standards, operating protocols, and the regulatory environment encompassing airports.

The St. Paul Downtown Airport houses several corporate tenants and a National Guard base. These stakeholders are sensitive to operational disruption and may be potential partners in adaptation efforts.

### **Existing Strategies**

In 2016, MAC commissioned a Climate Vulnerability Assessment Report for MSP. The Report utilized climate projection data and first-hand information from staff to create a series of actions and recommended next steps related specifically to climate hazards and subsequent impacts brought on by climate change. One of the objectives of the assessment is for MAC to apply its understanding of vulnerability at MSP to plan for adaptation measures at its reliever airports which would expand climate adaptation strategies throughout MAC's assets. This effort goes beyond the existing hazard mitigation practices in place at metropolitan airports.

### **Proposed Strategies**

#### *Metropolitan Council*

For nine out of ten regional airports, surface water flooding is generally low risk. With relatively large open areas, structures, and emergency resources sometimes already stationed on-site, these airports may be well positioned to provide relief service, a rescue staging area, or emergency shelter to local populations during or after an extreme event.

The St. Paul Downtown Airport faces flood challenges unique to the region, and due to its history of riverine flooding, the airport does have riverine flood protection already in place. Additional measures for St. Paul Downtown Airport might include:

- Council and MAC to incorporate localized flood planning with existing riverine flood plans
- Council and MAC to work with local road authorities to reduce peak vulnerability on one or more access roads at St. Paul Downtown Airport

#### *Local Strategies*

- MAC to expand its Climate Vulnerability Assessment Report to encompass reliever airports, with special emphasis on the St. Paul Downtown Airport

## Regional Bicycle Transportation Network (RBTN)

### Rationale

Flood waters can have widely varying impacts on bicyclists. Flowing water can cause instability or impassable conditions even at low depths, just as for a pedestrian. Conversely, relatively still water as much as 2-3 feet deep can still be traversed under optimal conditions.

The Regional Bike System Inventory does not include usage data or other attributes that can be evaluated systemwide, so a route by route comparison is not possible. Moreover, surface or pavement types vary widely and do not respond uniformly to flood conditions. As such, the Flood Impact Zone currently provides the best and most consistent means of assessing bike network exposure, with no further metric for exposure and sensitivity.

### Methodology


Bicycle commuting and recreation are supported by over 6,700 miles of trails and other dedicated or co-use bike routes across the metro area. A new Regional Bicycle System Inventory was compiled in 2016 by Council staff in coordination with city, county, and park authorities from around the region, and this inventory was intersected with Flood Impact Zone locations.

### Analysis

Network wide, 15.5% of all route mileage (1,049 miles) traverse potential flood areas. Affected portions of the bicycle network are well-distributed across the metro area, with trails extending beyond the urban core to the regional park system and along repurposed freight rail rights-of-way (Figure 12).

The Midtown Greenway in Minneapolis (Figure 13) is one high-use component of the network, with year-round daily ridership, connections to two Transit Centers, and numerous popular recreational and commercial activities along the length of the route. However, much of the Greenway is at low elevation relative to the surrounding landscape due to its location along a vacated below-grade railway, thus increasing flood

Figure 12. RBTN - Potential Localized Flood Vulnerability

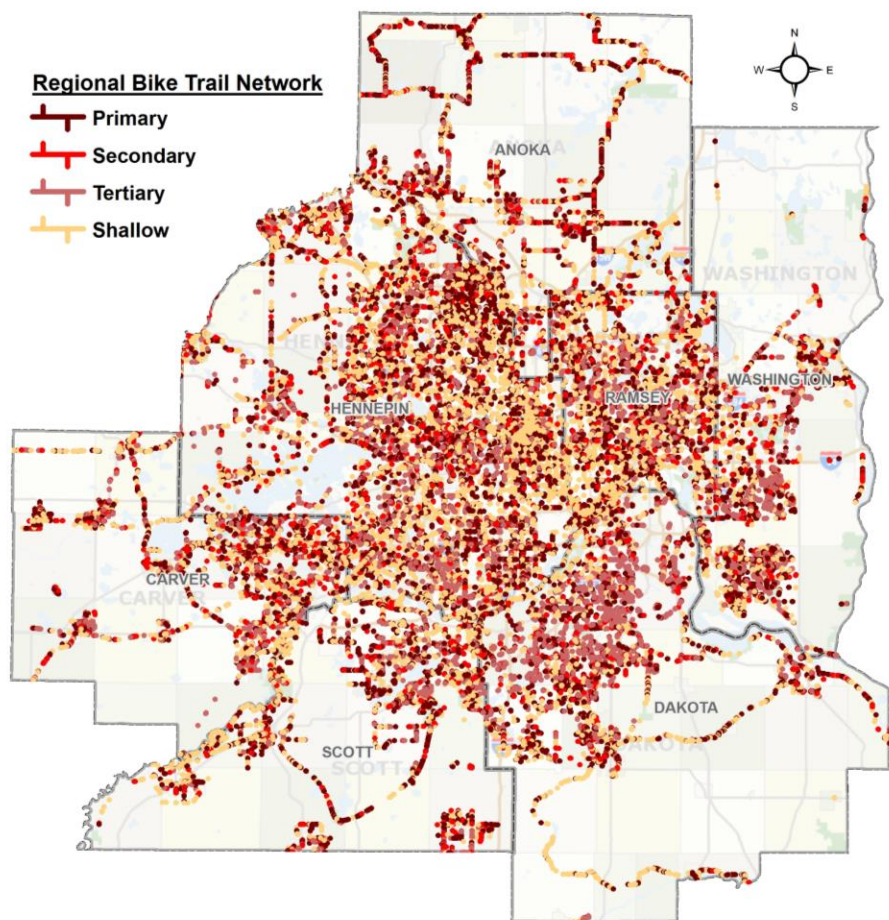



exposure. Safely diverting flows and increasing infiltration are desirable adaptation strategies, but may be difficult or costly within this type of physical setting. Strategies such as access management during flooding or establishing alternate routes may be more desirable for the Midtown Greenway and other area trails with similar elevation characteristics.


### Considerations

Critical Bicycle Transportation Links are part of the *2040 Transportation Policy Plan*, representing defined locations that improve accessibility to and connectivity across the network. As these links are defined and developed, they, and other facilities and resources that contribute to ridership and access (such as Nice Ride stations), may represent priorities for further assessment.

**MIDTOWN GREENWAY**

- 5.5** miles dedicated trail
- Over **2000** daily trips
- More than **120** transit stops within 1 block
- 2.3** mile continuous Flood Impact Zone
- Much of route below grade

Figure 13. Section of Midtown Greenway - Potential Localized Flood Vulnerability

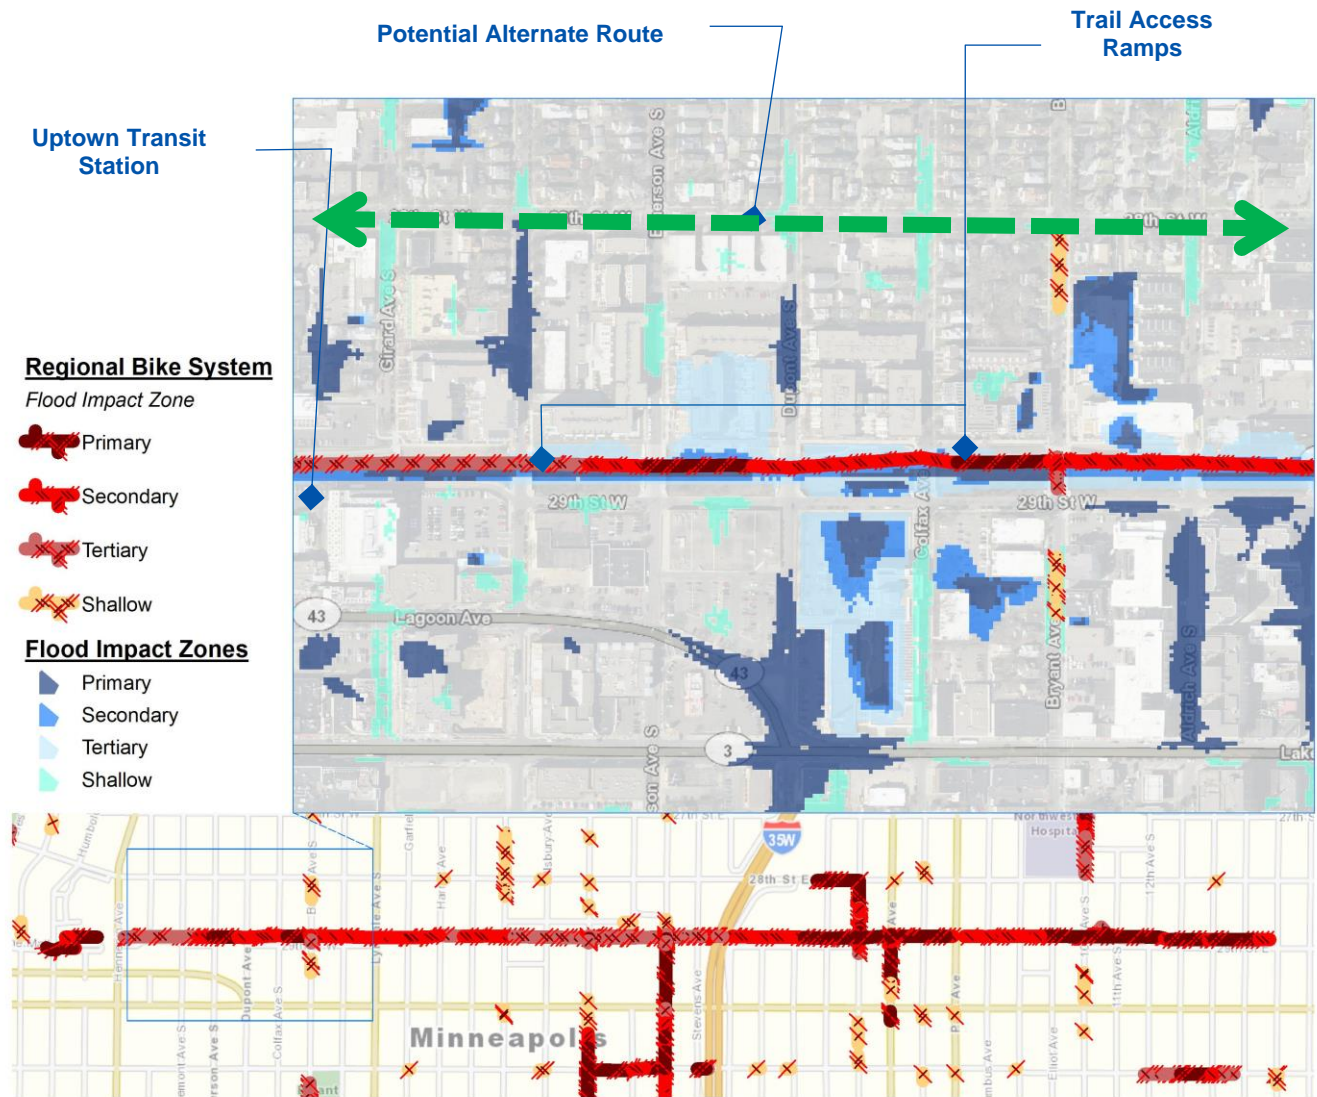



## Existing Strategies

The Regional Bicycle Transportation Network (RBTN) spans a large area, and the response to localized flooding across the regional network is not coordinated given the number of jurisdictions involved. It can be argued that a collaborative planning process should be utilized to identify potential areas and bicycle corridors susceptible to localized flooding prior to route finalization and subsequent implementation.

## Proposed Strategies

### *Metropolitan Council*

- Council to convene a regionwide stakeholder planning group to assess the potential impacts of localized flooding on the RBTN network to inform current maintenance and future planning

### *Local Strategies*

- Local jurisdictions to consider viability and impact of access management (temporary closures) versus other solutions
- Local jurisdictions to consider bicycle transportation alongside adaptation measures for co-use routes and transit hubs

## Next Steps

This assessment is regionwide and high level; its intention is to elicit a conversation about how best to embed use of the localized flood data into Council practice across department divisions. The assessment presents systemwide data and a more localized example for each transportation and transit asset. To get the most out of the data, staff propose a more in-depth analysis of specific bus routes, transit stops, bicycle commuter routes, LRT and commuter rail routes and connections, arterial road and local road networks, and airport connectivity and infrastructure. A rigorous analysis, coupled with other, complimentary data sources, will help the Council and relevant stakeholders prepare for the impacts of localized flooding within our region.

## Metropolitan Council Desired Outcomes

The following desired outcomes can provide a foundation for the strategy development for each system asset. These high-level outcomes apply to all system assets for transportation and transit.

**Prioritize operations and asset management through verification of localized flooding vulnerability.** The auditing and verification of vulnerable areas within the transportation and transit system will assist Council operations and asset management. Ground-truthing areas of highest vulnerability will facilitate operational and asset management prioritization across the each respective system.

**Manage stormwater locally, on site, as much as possible.** This outcome can be achieved through deployment of low-tech strategies that absorb rainwater locally, with special attention given to High and Very High vulnerability areas. These strategies require collaboration with local and agency stakeholders to, for instance, reduce the percentage of impermeable surfaces in High and Very High vulnerability areas through installation of permeable paving, green stormwater infrastructure, and maintenance of existing stormwater conveyance through volunteer adopt-a-drain programs available in many cities. Such practices and programs could be employed to ensure reduce transit disruptions due to localized flooding.

**Ensure that flooding takes place only where it does the least damage.** System planning should consider that flooding will occur and will affect the transportation and transit systems. System assets should be planned to ensure that flooding does not impact large amounts of riders or vehicles using the systems and that redundancy plans are made that consider High and Very High vulnerability areas. When new roads or transit are planned, the localized flooding data can assist in showing where to incorporate surface water features based on existing topography that provides infiltration and diverts water from high priority assets to allow flooding of areas that are less critical to operations and public safety.

**Ensure that public safety information is available for riders.** When the Council performs a more rigorous asset by asset analysis of localized flooding, it should prioritize conveying potential public safety matters related to localized flooding in higher priority areas and on higher risk routes in a variety of media formats and languages.

**Convene a regional stakeholder group and continue collaboration.** In considering climate-related hazards and subsequent strategies for the regional transportation and transit networks, the Council should convene a regional collaborative stakeholder group representing multiple jurisdictions. One of the greatest challenges to strategy implementation to reduce the impact of localized flooding on regional systems is the multijurisdictional nature of the work. Oftentimes, there are layers of responsibility to consider when implementing adaptation strategies at the ground level. Through convening a regional stakeholder forum on system impacts from climate hazards, the Council can increase regional and local climate resiliency through collaboration.

## **Going Beyond Hazard Mitigation**

While Metro Transit and its partners have robust protocols and procedures in place for hazard mitigation, it is recommended that Metro Transit perform a focused assessment of potential localized flooding impacts. In addition, the localized flood data can also be used as a preliminary planning tool to assist in providing transportation and transit route redundancy in the event of operations or asset disruption.

Hazard mitigation is key in ensuring that procedures are in place to effectively react in a crisis situation, but it cannot always account for the more incremental, chronic climate stresses to Council systems. An additional and more focused consideration of climate hazards and subsequent impacts can allow for a more proactive approach to identifying potential vulnerabilities in our transportation and transit systems.

The Council should work with partners to go beyond the hazard mitigation approach, which tends to focus on how best to prevent and react to disasters or emergencies. To further the work, the localized flooding analysis could be incorporated into the Council's transportation and transit planning efforts as well as in its ongoing assessment of system assets, be they bus routes, access to and from an airport, or our growing regional bicycle transportation network.

## **Building Equity into Policies and Strategies**

Equity is a desired outcome identified in Thrive, but planners do not often consider the disparate impacts of climate change on underserved or vulnerable populations. Human vulnerability to climate change should be considered in the planning and operations of the transportation and transit network in areas with populations that are more vulnerable to climate change impacts. Often, social vulnerability to climate change impacts is more difficult to measure than infrastructure vulnerability, due to the many variables that may contribute to a person, family, or community's vulnerability.

It is important that the Council consider its system vulnerability to climate change with equitable outcomes in mind. For instance, some parts of the region may rely on the transit system for travel to work, business, school, and leisure activities. It is vital to consider system and asset vulnerability with such factors in mind so that the Council can work to reduce human vulnerability to climate change through its asset management responsibilities.

## Summary of Proposed Council Strategies

Table 6. Highway Network, Proposed Strategies

Potential Strategy	Authority	Collaboration Required	Existing Practice	Priority	Cost/Time
Council to conduct arterial assessment of vulnerable areas through collaboration with relevant road authority and stakeholders	MnDOT; MC-MTS; Counties; LGU	Yes	MnDOT culvert study	High	Low/Low
Council to collaborate with relevant authorities and stakeholders to increase surface water infiltration in potential vulnerable areas	MnDOT; MC-MTS; Counties; LGU	Yes		Med	High/High
Council to plan for re-routing/alternative routes with agency and community partners	MnDOT; MC-MTS; Counties; LGU	Yes		Med	Low/Med
Council to facilitate creation of a regional notification of road re-routing, similar to the <a href="#">Hennepin County Map</a>	MnDOT; MC-MTS; Counties; LGU	Yes	<a href="#">Hennepin County Map</a>	Med	Med/Med

Table 7. Light Rail/Commuter Rail, Proposed Strategies

Potential Strategy	Authority	Collaboration Required	Existing Practice	Priority	Cost/Time
Metro Transit/BNSF to perform site review & audit of all Shallow & Primary rail segments	Metro Transit; BNSF	Likely		Med	Low/Low
Metro Transit staff to document all flood areas that disrupt LRT operations and compare these to localized flooding data	Metro Transit	No	SOPs	Med	Med/Med
Metro Transit to enact protocols for relief transit vehicles in advance of forecasted storms	Metro Transit	No	SOPs	Low	Med/Med
Metro Transit to assess localized flood impacts on rail operations hardware using structure technical specifications for water infiltration	Metro Transit	No	SOPs	Low	Med/Med
Metro Transit to work with local jurisdictions and stakeholders to enact stormwater best management practices and ongoing maintenance in jurisdiction's right-of-way along LRT and Commuter transit corridors	Metro Transit; Road Authority	Yes		Low	High/Med
Metro Transit to prioritize vulnerable station areas to communication localized flood potential in a variety of formats and languages	Metro Transit; BNSF	Likely		Med	Low/Med



**Table 8. Bus Transit, Proposed Strategies**

Potential Strategy	Authority	Collaboration Required	Existing Practice	Priority	Cost/Time
Metro Transit to conduct a more detailed analysis and prioritization of all vulnerable routes and stops across the network	Metro Transit; Partners	Likely		High	Med/Med
Metro Transit to develop re-routing plans for potential vulnerable areas on a route-by-route basis	Metro Transit; Partners	Likely	SOPs	Med	Med/Med
Metro Transit to leverage local knowledge of experienced drivers for re-routing and temporary stop planning	Metro Transit; Partners	Likely		Med	Low/Med
Metro Transit to work with relevant local stakeholders to institute volunteer adopt-a-drain- programs for local bus stops, using vulnerable routes and stop areas for prioritization	Metro Transit; Partners	Likely	SOPs	Med	Low/Med
Metro Transit to prioritize vulnerable routes and bus stops to communicate localized flood potential to riders in a variety of formats and languages	Metro Transit; Partners	Likely	SOPs	Med	Low/Low

**Table 9. Aviation, Proposed Strategies**

Potential Strategy	Authority	Collaboration Required	Existing Practice	Priority	Cost/Time
Council and MAC to incorporate localized flood planning with existing riverine flood plans	MC-MTS; MAC	Yes		Med	Med/Med
Council and MAC to work with local road authorities to reduce peak vulnerability on one or more access roads at St. Paul Downtown Airport	MC-MTS; MAC; Road Authority	Yes		Med	Med/Med

**Table 10. Regional Bicycle Transportation Network (RBTN), Proposed Strategies**

Potential Strategy	Authority	Collaboration Required	Existing Practice	Priority	Cost/Time
Council to convene a regionwide stakeholder planning group to assess the potential impacts of localized flooding on the RBTN network to inform current maintenance and future planning	MC-MTS; Counties; Road Authority	Yes		Med	Low/Med

## Acronyms

BNSF – Burlington Northern Santa Fe Railroad  
BRT – Bus Rapid Transit  
CFR – Code of Federal Regulations  
CVA – Climate Vulnerability Assessment  
DEM – Digital Elevation Model  
DFIRM – Digital Flood Insurance Rate Map  
GIS – Geographic Information Systems  
GHG – Greenhouse Gas  
FEMA – Federal Emergency Management Administration  
FAA – Federal Aviation Administration  
FIZ – Flood Impact Zone  
FRA – Federal Railroad Association  
ICS – Incident Command System  
LiDAR - Light Detection and Ranging  
LGU – Local Governmental Unit  
LST – Land Surface Temperature  
LRT – Light Rail Transit  
MAC – Metropolitan Airports Commission  
MC-MTS – Met Council - Metropolitan Transportation Systems  
MSP – Minneapolis-St. Paul International Airport  
MVTA – Minnesota Valley Transit Authority  
NOAA – National Oceanic and Atmospheric Administration  
NIMS – National Incident Command System  
RBTN – Regional Bicycle Transportation Network  
SOP – Standard Operative Procedure  
SSPP – System Safety Program Plan  
TCC – Transit Control Center  
TPP – 2040 Transportation Policy Plan  
TP40 – Technical Paper 40 - Rainfall Frequency Atlas  
UHI – Urban Heat Island Effect

## References

Bicycling Magazine. The 50 Best Bike Cities of 2016. (September 19, 2016). Retrieved June 21, 2017, from <http://www.bicycling.com/culture/news/the-50-best-bike-cities-of-2016/slide/6>

BNSF. Special System Instructions. (2013). Retrieved June 21, 2017, from <http://www.smartlocal933.org/BNSF%20SSI%20No.4.pdf>

Metro Transit. Metro Transit ridership tops 82.6 million in 2016. (January 13, 2017). Retrieved June 21, 2017, from <https://www.metrotransit.org/metro-transit-ridership-tops-826-million-in-2016>

Metropolitan Airports Commission (MAC). (2017). Retrieved June 21, 2017, from <https://www.metroairports.org/general-aviation.aspx>

Metropolitan Council. Thrive MSP 2040 – One Vision, One Metropolitan Region. (2014). Retrieved June 21, 2017, from <https://metrocouncil.org/Planning/Projects/Thrive-2040.aspx>

Metropolitan Council. Twin Cities Regional Bike Study. Defining Critical Bicycle Transportation Links. (2014). Retrieved June 21, 2017, from <https://metrocouncil.org/Transportation/Planning-2/Transit-Plans,-Studies-Reports/Bike-Pedestrian-Planning/Regional-Bicycle-System-Study-Final-Report/RBS-4-2-Critical-Links-Section.aspx>

Metropolitan Council Environmental Services (MCES). 2015 Performance Report. (May 2016). Retrieved June 21, 2017, from <https://metrocouncil.org/Wastewater-Water/Publications-And-Resources/MCES-INFORMATION/MCES-Performance-Report.aspx>

Midtown Greenway Coalition. About the Greenway. (2017). Retrieved June 21, 2017, from <http://midtowngreenway.org/about-the-greenway/>

National Weather Service. Infographic – Power of Water. (2017). Retrieved June 21, 2017, from <https://www.weather.gov/wrn/spring2017-flood-sm>

US Department of Transportation. Takeoff Performance Data for Operations on Contaminated Runways. (December 22, 2015). Retrieved June 21, 2017, from [https://www.faa.gov/documentLibrary/media/Advisory\\_Circular/AC\\_25-31.pdf](https://www.faa.gov/documentLibrary/media/Advisory_Circular/AC_25-31.pdf)



390 Robert Street North  
Saint Paul, MN 55101-1805

651.602.1000  
TTY 651.291.0904  
public.info@metc.state.mn.us  
metro council.org

Follow us on:  
[twitter.com/metcouncilnews](https://twitter.com/metcouncilnews)  
[facebook.com/MetropolitanCouncil](https://facebook.com/MetropolitanCouncil)  
[youtube.com/MetropolitanCouncil](https://youtube.com/MetropolitanCouncil)